

Introcan® Certo

The new range of indwelling IV cannulas with polyurethane catheter

Polyurethane catheter

Polyurethane has been proven millions of times over in Central Venous Catheters

- excellent biocompatibility
- increased flexibility by more than 50% in blood stream at body temperature
- extremely smooth surfaces
- kink-resistant / readjusting properties
- high resistance to tearing
- for a complication-free indwelling time

Excellent puncture characteristics

- gentle and accurate venipuncture by metal needle with electropolished, sharp backcut bevel
- sensitive catheter insertion by extremely smooth and microsiliconized catheter surfaces

Plate on the capillary hub

- sensitive catheter insertion using single-hand technique
- better fixation of the vein to be punctured using the free hand


Integrated closing cone

- facilitates immediate sealing of the catheter after withdrawal of the metal needle

- for reliable puncture success, less painful for the patient

Introcan® Certo 24 G

- especially suited for paediatrics, geriatrics and ambulances
- for fast, safe puncture even of the smallest veins and in case of difficult venous conditions

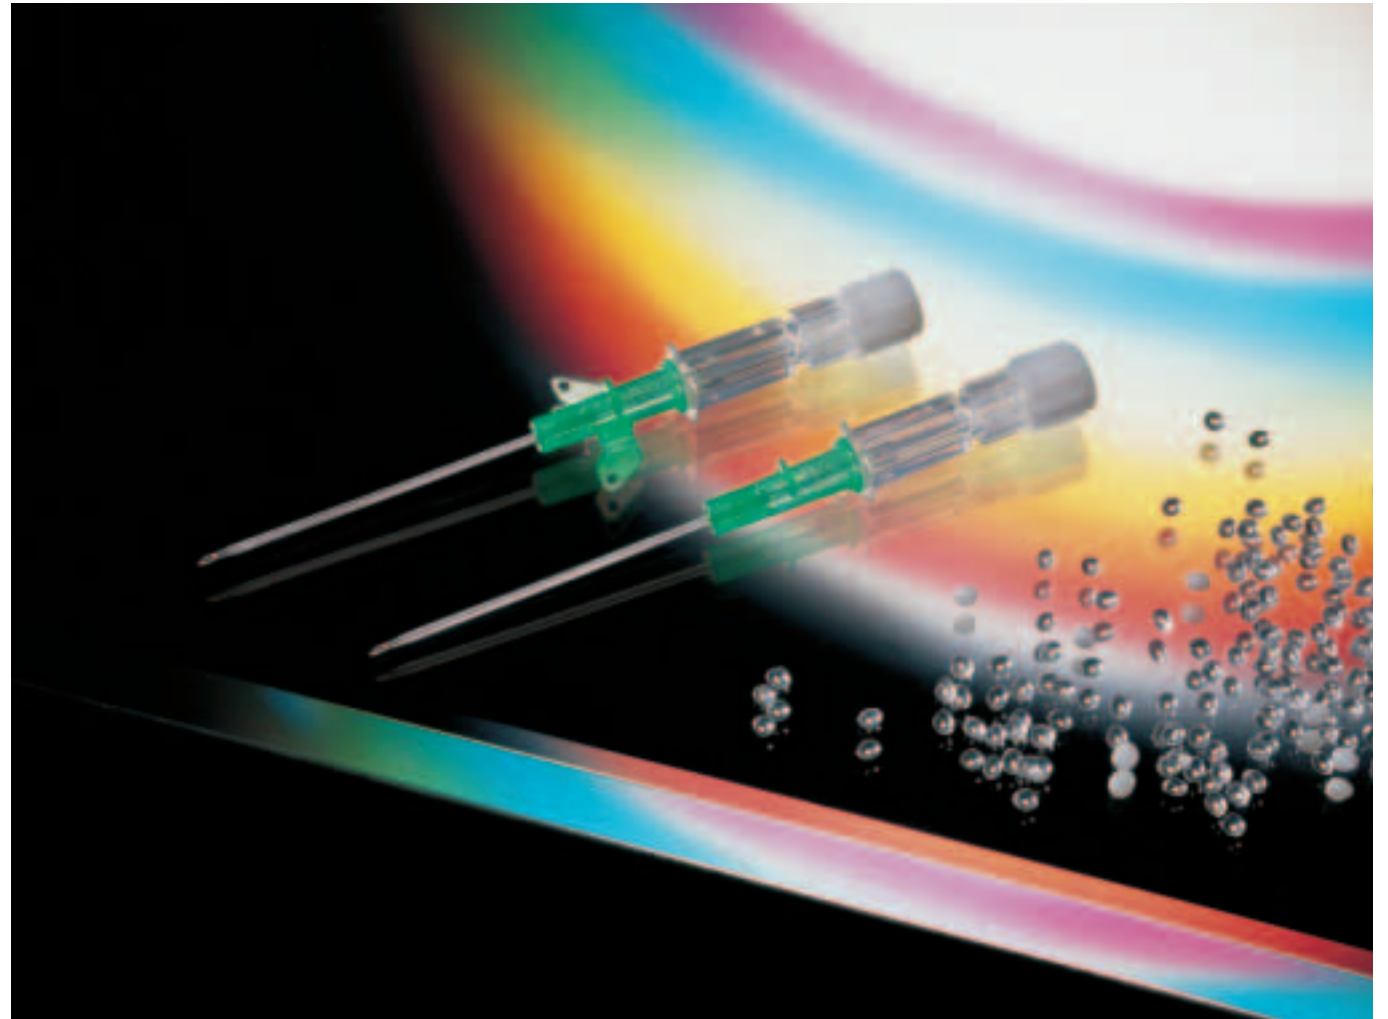

for a longer and complication-free indwelling time

B | BRAUN
HOSPITAL CARE


B. Braun Melsungen AG
P.O. Box 11 20
D-34209 Melsungen
Tel +49 (0) 56 61 71-0
Fax +49 (0) 56 61 71-20 44
www.bbraun.com

B. 01. 08. 01/4 - Nr. 604 3518
Printed on chlorine-free, bleached cellulose using 50% recycled paper

B | BRAUN

Introcan® Certo

with superior catheter characteristics

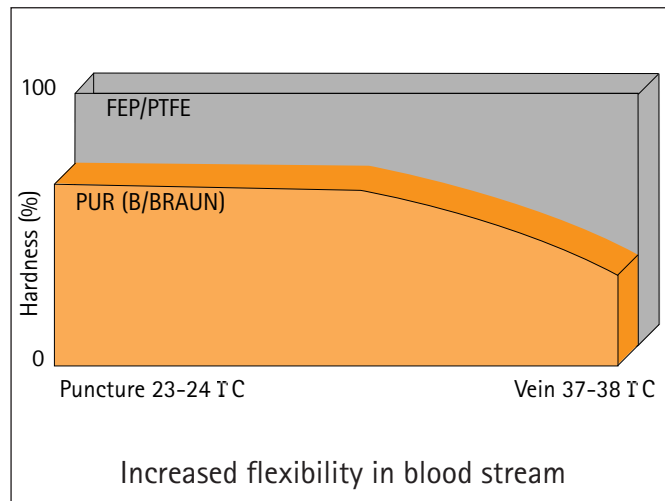

Product Specification



Size/Gauge	24 G	22 G	20 G	18 G	18 G	16 G	14 G
Size/Ø mm	0.7	0.9	1.1	1.3	1.3	1.7	2.2
Effective length/mm	19	25	32	45	32	50	50
Flow rate ml/min	22	35	60	100	105	210	345
Colour Code	yellow	blue	rose	green	green (with white stripes)	grey	orange
Code no. Introcan® Certo (with fixation wing)	0425 3302	0425 3310	0425 3329	0425 3337	0425 3345	0425 3353	0425 3361
Code no. Introcan® Certo (without fixation wing)	0425 1300	0425 1318	0425 1326	0425 1334	0425 1342	0425 1350	0425 1369
Code no. Stylet	-	0421 4099	0421 4110	0421 4137	0421 4323	0421 4170	0421 4218

Sales unit: 200 pieces

ISO 10555-1/5